

T72XW

Advanced Performance Stainless Steel Indicator with External Device Control Capabilities

- With a 50,000 displayed resolution and the ability to support up to 10 load cells, T72XW was designed for heavy-duty industrial applications.
- Two available option slots enable a wide range of connectivity interfaces. Control external devices using the discrete I/O interface and transfer data through the serial, USB or Ethernet ports.
- T72XW is very easy to set up and navigate, a vivid graphic display with on-screen prompts and an alphanumeric keypad with designated keys for common functions such as Tare and ID information.



With Truck In/Out Mode

Application Weighing, Parts Counting, Checkweighing, Animal / Dynamic Weighing , Totalization, Truck In/Out

Display Transflective graphic LCD with white backlight, 240 x 96 pixels

Operation AC Power (Included)

Communication RS232 and SD card reader with SD card included. Ethernet, USB/Discrete I/O or COM2 kit with 2nd RS232/485 available.

Construction IP66/NEMA 4X stainless steel housing and mounting bracket

Design Features User-configurable resolution 50,000d/10,000e, Checkweighing lights with selectable operation and audible signal settings, sealed front panel, five operating languages (English, Spanish, French, German and Italian), selectable environmental and auto-print settings, stability indicator, overload/underload indicators, NTEP Certified and Measurement Canada Approved

Model	Protection Rating	Item No.
T72XW	IP66; NEMA 4X	30126959

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Printer, Thermal, STP-103, US (requires 80500525)	80251992
Ethernet Kit, T72XW	30132163
USB with I/O Kit, T72XW	30132164
COM2 Kit, T72XW	30132165
Column Adapter, SST, T32XW T51XW T71XW	72209340
Cable, RS232, CKW TxxXW	80500552
Cable ST103 - TxxXW	80252584
Software, Winwedge	80850080

Checkweighing, Dynamic Weighing, Totalization, Audible Alerts, Auto Shut-Off, Auto Standby, Backlight, Environmental Filters, GMP/GLP, Time/Date, NTEP Certified, Parts Counting, Weighing, Low Battery Indicator, Multi-Language, NEMA 4X IP66, Overload/Underload Indicators, Software Lockout, Stability Indicator, Measurement Canada Approved

Indicators

T71XW

High Performance Stainless Steel Washdown Indicator for Advanced Applications

- T71XW can support advanced features such as accumulation mode, a 255-item library and optional alibi memory capability, and also has a 1:50,000 maximum displayed resolution.
- This advanced indicator has dual-scale capabilities in which it can display the weights from two platforms and is powerful enough to drive up to 8 - 350 ohm load cells per platform.
- With a full alphanumeric keypad and dual-line display, as well as SmarText™ software that utilizes text prompts to guide users through set up and use, T71XW is simple to operate.




For a Limited Time

- Application** Weighing, Parts Counting, Percent Weighing, Checkweighing, Dynamic/Animal Weighing, Accumulation, Display Hold
- Display** Backlit liquid crystal display (LCD) with secondary information line, 3 color Checkweighing LEDs
- Operation** Power cord (included) or rechargeable battery (accessory sold separately)
- Communication** RS232 (included). Internal 2nd RS232, RS232/RS485, AC or DC relay kits available. GLP/GMP data output with real-time clock.
- Construction** IP66/NEMA 4X stainless steel housing and mounting bracket
- Design Features** User-configurable resolution 50,000d/10,000e, Alibi memory kit (accessory sold separately), five operating languages, NTEP Certified and Measurement Canada Approved

Model	Protection Rating	Item No.
T71XW	IP66; NEMA 4X	83999839

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Printer, Thermal, STP-103, US (requires 80500525)	80251992
PCBA Kit, Alibi Memory, R71 T71	80500503
Cable, RS232, CKW TxxXW	80500552
Relay Kit, AC, T51 T71	80500720
Relay Kit, DC, T51 T71	80500727
Rechargeable Battery Kit, T51 T71	80500729
RS422/485 Kit, T51 T71	80500731
RS232 Kit, T51 T71	80500733
Wall Mount Kit, SST, T51XW T71XW	80500735
Software, Winwedge	80850080
Column Kit, Painted, Floor Stand	30047153
Column Kit, Stainless Steel, Floor Stand	30047154
Cable ST103 - TxxXW	80252584

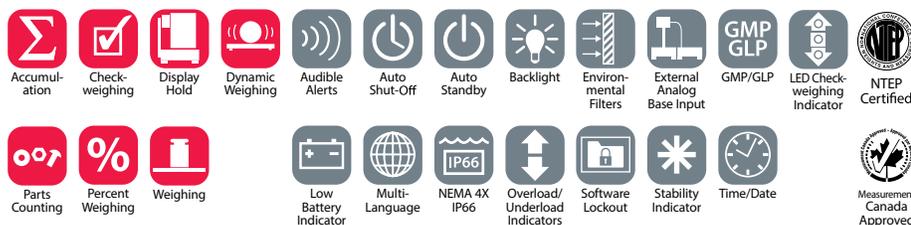

T71P

High Performance Indicator for Advanced Applications

- T71P can support advanced features such as accumulation mode, a 255-item library and optional alibi memory capability, and also has a 1:50,000 maximum displayed resolution.
- This advanced indicator has dual-scale capabilities in which it can display the weights from two platforms and is powerful enough to drive up to 8 - 350 ohm load cells per platform.
- With a full alphanumeric keypad and dual-line display, as well as SmarText™ software that utilizes text prompts to guide users through set up and use, T71P is simple to operate.



For a Limited Time

- Application** Weighing, Parts Counting, Percent Weighing, Checkweighing, Dynamic/Animal Weighing, Accumulation, Display Hold
- Display** Backlit liquid crystal display (LCD) with secondary information line, 3 color Checkweighing LEDs
- Operation** Power cord (included) or 6 C (LR14) batteries (not included) or rechargeable battery (accessory sold separately)
- Communication** RS232 (included). Internal 2nd RS232, RS232/RS485, AC or DC relay kits available. External RS232-USB or RS232-Ethernet connectors available. GLP/GMP data output with real-time clock.
- Construction** ABS housing and painted steel mounting bracket, non-slip rubber feet
- Design Features** User-configurable resolution 50,000d/10,000e, Alibi memory kit (accessory sold separately), five operating languages, NTEP Certified and Measurement Canada Approved

Model	Item No.
T71P	83998180

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Wall Mount Kit, Painted, T51P T71P	72200227
Printer, Thermal, STP-103, US	80251992
PCBA Kit, Alibi Memory, R71 T71	80500503
Cable, RS232, IBM 9P, AV DV MB Ranger	80500525
Relay Kit, AC, T51 T71	80500720
Base Mount Kit, Painted, T51P T71P	80500722
Relay Kit, DC, T51 T71	80500727
Rechargeable Battery Kit, T51 T71	80500729
RS422/485 Kit, T51 T71	80500731
RS232 Kit, T51 T71	80500733
Software, Winwedge	80850080
Interface Kit, RS232-USB	30304101
Interface Kit, RS232-Ethernet	30304102



Indicators

T51XW

Multifunctional Stainless Steel Washdown Indicator for Standard Industrial Applications

- T51XW features software for parts counting, dynamic weighing, percent weighing, Checkweighing, display hold for large containers and can meet traceability requirements.
- Multiple connectivity capabilities include built-in RS232 bi-directional interface and external input as well as optional RS422/485, second RS232 and AC or DC relay.
- The durably-built T51XW NEMA 4X/IP66 stainless steel water resistant indicator has a hinged front cover that opens easily for servicing and installation of the connectivity options.



For a Limited Time

- Application** Weighing, Parts Counting, Percent Weighing, Checkweighing, Dynamic/Animal Weighing, Display Hold
- Display** Backlit liquid crystal display (LCD), 3 color Checkweighing LEDs
- Operation** Power cord (included) or rechargeable battery (accessory sold separately)
- Communication** RS232 (included). Internal 2nd RS232, RS232/RS485, AC or DC relay kits available. GLP/GMP data output with real-time clock.
- Construction** IP66/NEMA 4X stainless steel housing and mounting bracket, four-key membrane keypad, easy-open hinged front cover
- Design Features** User-configurable resolution up to 30,000d/10,000e, NTEP Certified and Measurement Canada Approved

Model	Protection Rating	Item No.
T51XW	IP66; NEMA 4X	83999840

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Printer, Thermal, STP-103, US (requires 80500525)	80251992
Cable, RS232, CKW TxxXW	80500552
Relay Kit, AC, T51 T71	80500720
Relay Kit, DC, T51 T71	80500727
Rechargeable Battery Kit, T51 T71	80500729
RS422/485 Kit, T51 T71	80500731
RS232 Kit, T51 T71	80500733
Wall Mount Kit, SST, T51XW T71XW	80500735
Cable Kit, Loadcell Adapter, T51 T71	80500736
Software, Winwedge	80850080
Column Kit, Painted, Floor Stand	30047153
Column Kit, Stainless Steel, Floor Stand	30047154
Cable ST103 - TxxXW	80252584



T51P

Multifunctional ABS Plastic Indicator for Standard Industrial Applications

- T51P features software for parts counting, dynamic weighing, percent weighing, Checkweighing, display hold for large containers and can meet traceability requirements.
- Multiple connectivity capabilities include built-in RS232 bi-directional interface and external input as well as optional RS422/485, second RS232 and AC or DC relay.
- The durably-built ABS plastic housing T51P has a reversible rear cover that supplies multiple mounting options, including, wall, column, scale front, or table-top mounting.




For a Limited Time

- Application** Weighing, Parts Counting, Checkweighing, Dynamic/Animal Weighing, Display Hold, Percent Weighing
- Display** Backlit liquid crystal display (LCD), 3 color Checkweighing LEDs
- Operation** Power cord (included) or 6 C (LR14) batteries (not included) or rechargeable battery (accessory sold separately)
- Communication** RS232 (included). Internal 2nd RS232, RS232/RS485, AC or DC relay kits available. External RS232-USB or RS232-Ethernet connectors available. GLP/GMP data output with real-time clock.
- Construction** ABS housing and painted steel mounting bracket, four-key membrane keypad, reversible front cover, non-slip rubber feet
- Design Features** User-configurable resolution up to 30,000d/10,000e, NTEP Certified and Measurement Canada Approved

Model	Item No.
T51P	83998179

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Printer, Thermal, STP-103, US (requires 80500525)	80251992
Cable, RS232, IBM 9P, AV DV MB Ranger	80500525
Cable, SF42-AV DV MB Ranger	80500571
Interface Kit, RS232-USB	30304101
Interface Kit, RS232-Ethernet	30304102
Relay Kit, AC, T51 T71	80500720
Base Mount Kit, Painted, T51P T71P	80500722
Relay Kit, DC, T51 T71	80500727
Rechargeable Battery Kit, T51 T71	80500729
RS422/485 Kit, T51 T71	80500731
RS232 Kit, T51 T71	80500733
Software, Winwedge	80850080
Column Kit, Painted, Floor Stand	30047153
Column Kit, Stainless Steel, Floor Stand	30047154

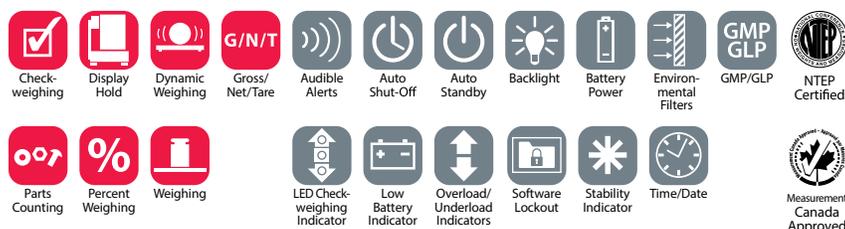

Indicators

T32XW

Economical Stainless Steel Washdown Indicator for Basic Industrial Applications




- The NEMA 4X/IP65 stainless steel construction protects the indicator from water damage and a hinged front cover opens up easily, offering instant access for servicing.
- The long-lasting internal rechargeable battery provides continuous operation for up to 58 hours, ensuring uninterrupted operation for more than two straight days.
- Simple operation enhanced by an easy-to-read display and even basic counting mode round out this industrial indicator, making it ideal for everyday basic industrial use.

- Application** Weighing, Parts Counting
- Display** Backlit liquid crystal display (LCD)
- Operation** Power cord (included) or rechargeable battery (included)
- Communication** Easy access communication port including RS232 interface (included)
- Construction** IP65/NEMA 4X stainless steel housing and mounting bracket, easy-open hinged front cover
- Design Features** User-configurable resolution up to 20,000d/6,000e, NTEP Certified and Measurement Canada Approved

Model	Protection Rating	Item No.
T32XW	IP65; NEMA 4X	83999823

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Printer, Thermal, STP-103, US (requires 80500525)	80251992
Cable, RS232, CKW TxxXW	80500552
Software, Winwedge	80850080
Column Kit, Painted, Floor Stand	30047153
Column Kit, Stainless Steel, Floor Stand	30047154
Cable ST103 - TxxXW	80252584



T32M

Economical Metal Indicator for Basic Industrial Applications

- T32MC and T32ME are OIML approved, NTEP certified, and Measurement Canada approved for use in all legal-for-trade applications.
- Application modes include weighing, simple parts counting, basic Checkweighing, display hold and accumulation of results.
- Constructed of painted steel housing and high-impact ABS faceplate, T32MC and T32ME are highly durable.

Application	Weighing, Parts Counting, Checkweighing, Accumulation, Display Hold
Display	T32MC: Backlit liquid crystal display (LCD) T32ME: Light-emitting diode display (LED)
Operation	AC adapter (included)
Communication	Easy access communication port including RS232 interface (included). External RS232-USB or RS232-Ethernet connectors available.
Construction	Front ABS/rear painted steel housing and painted steel mounting bracket
Design Features	User-configurable resolution up to 20,000d/6,000e, NTEP Certified and Measurement Canada Approved



Model	Item No.
T32ME	83998166
T32MC	83998167

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Printer, Thermal, STP-103, US (requires 80500525)	80251992
Cable, RS232, IBM 9P, AV DV MB Ranger	80500525
Software, Winwedge	80850080
Column Kit, Painted, Floor Stand	30047153
Column Kit, Stainless Steel, Floor Stand	30047154
Interface Kit, RS232-USB	30304101
Interface Kit, RS232-Ethernet	30304102



Indicators

T31P

Economical ABS Plastic Indicator for Basic Industrial Applications

- T31P is OIML approved, NTEP certified and Measurement Canada approved for use in all legal-for-trade applications.
- The ultra-long-lasting internal rechargeable battery provides operation on a single charge for up to 120 hours.
- The reversible rear cover offers the flexibility for connected cables to exit above or below the indicator housing.


- Application** Weighing, Parts Counting
- Display** Backlit liquid crystal display (LCD)
- Operation** AC adapter (included) or rechargeable battery (included)
- Communication** Easy access communication port including RS232 interface (included). External RS232-USB or RS232-Ethernet connectors available.
- Construction** ABS housing and painted steel mounting bracket, non-slip rubber feet
- Design Features** User-configurable resolution up to 20,000d/6,000e, NTEP Certified and Measurement Canada Approved



Front mount handle accessory available

Model	Item No.
T31P	83998110

Accessories	Item No.
Printer, Impact, SF40A, AM	30064203
Printer, Thermal, STP-103, US (requires 80500525)	80251992
Cable, RS232, IBM 9P, AV DV MB Ranger	80500525
Software, Winwedge	80850080
Column Kit, Painted, Floor Stand	30047153
Column Kit, Stainless Steel, Floor Stand	30047154
Interface Kit, RS232-USB	30304101
Interface Kit, RS232-Ethernet	30304102
Handle Kit, D3K	30381321



WWW.HOSKIN.CA

- INTEGRATED SYSTEMS • RENTALS • SERVICE
- ENVIRONMENTAL • INSTRUMENTATION • MATERIALS TESTING

Vancouver | Burlington | Montréal | Edmonton